


**Features**

- RoHS compliant
- Efficiency up to 80%
- 1.6kVDC Isolation
- Single output
- Short circuit protection( Suffix “R2” ,optional)
- Industry standard required
- Wide temperature performance at full 0.5 Watt load,-40°C to 85°C

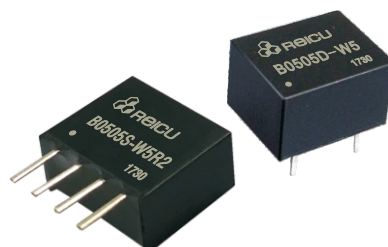

**Model Selection Guide**

Order Code	Vin(V)		Output		Max capacitive Load	Efficiency(%) (Typ)
	Nominal	Range	Vo(V)	Io(mA)		
B0303S/D-W5(R2)	3.3	3.0-3.6	3.3	152	100	72
B0305S/D-W5(R2)			5	100		74
B0505S/D-W5(R2)			5	100		70
B0509S/D-W5(R2)	5	4.5-5.5	9	56	68	77
B0512S/D-W5(R2)			12	42		79
B0515S/D-W5(R2)			15	33		81
B0524S/D-W5(R2)			24	21		78
B1205S/D-W5(R2)			5	100		71
B1209S/D-W5(R2)	12	10.8-13.2	9	56	68	78
B1212S/D-W5(R2)			12	42		78
B1215S/D-W5(R2)			15	33		80
B1224S/D-W5(R2)			24	21		80
B2405S/D-W5(R2)			5	100		72
B2409S/D-W5(R2)	24	21.6-26.4	9	56	68	78
B2412S/D-W5(R2)			12	42		79
B2415S/D-W5(R2)			15	33		79
B2424S/D-W5(R2)			24	21		79

\*All the specifications typical at Ta=+25°C resistive load, nominal input voltage and rated output current unless otherwise noted.

**Input Characteristics**

Parameter	Condition	Min	Typ	Max	Units
Input Surge Voltage (1 sec. Max.)	3.3V Input Models	-0.7	--	6	VDC
	5V Input Models	-0.7	--	9	
	12V Input Models	-0.7	--	18	
	24V Input Models	-0.7	--	30	
Input Filter	All Models	Internal Capacitor			


**Output Characteristics**

Parameter	Condition	Min	Typ	Max	Units
Line regulation	Vin change 1%	±1.2	--	±1.5	%
Switching frequency	Full load,nominal input	--	100	--	KHz
Load regulation	10%~100% load	6.5	--	15	%
Ripple and noise	BW=DC to 20MHz	--	75	≤100	mVp-p
Short circuit Protection	Suffix “R2”	Continuous, Automatic Recovery			


**General Characteristics**

Parameter	Condition	Min	Typ	Max	Units
Operating Temperature	All output types	-40	--	+85	°C
Storage		-55	--	+125	°C
Storage humidity		--	--	+95	%
Cooling	Free air convection	--	--	--	
Isolation voltage	1mA≤1minute	--	1600	--	VDC
Isolation resistance	500VDC	1000	--	--	MΩ
Switching Frequency		--	100	110	KHz
MTBF	3.5×10 <sup>6</sup>				K hours

**Tolerance Envelopes Curve**

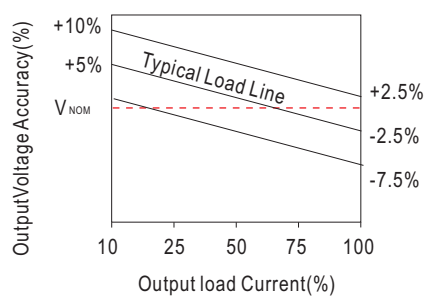


**Temperature Derating Graph Curve**

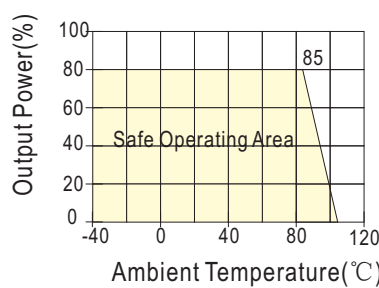

**Input/Output Ripple Reduction**

Reduce output ripple, it is recommended to use capacitors at the input/output.

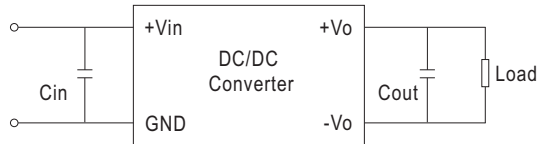

**External Capacitor Table**


Vin(VDC)	5	12	15	24	
Cin(uF)	4.7	2.2	2.2	1	
Vout(VDC)	5	9	12	15	24
Cout(uF)	10	4.7	2.2	1	0.47

**Note**

1. To ensure this module can operate efficiently and reliably, During operation, the minimum output load is not less than 10% of the full load.
2. Other input and output voltage may be available, please
3. Specifications subject to change without notice

**Mechanical Dimension & Pin Connections**


**B\*\*\*\*S-W5**

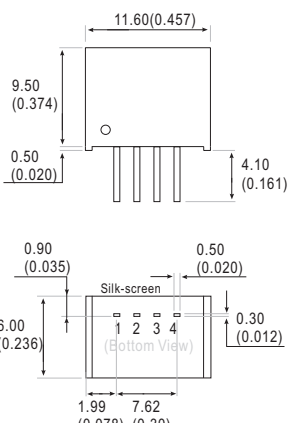

Pin	1	2	3	4
Function	GND	Vin	-Vo	+Vo

Note:  
Unit:mm(inch)

**B\*\*\*\*D-W5**

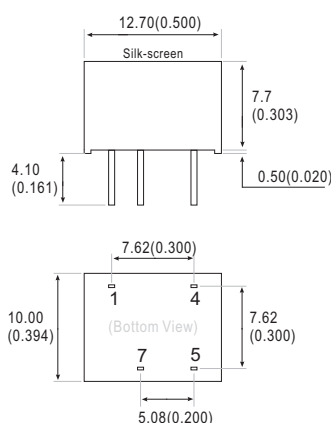

Pin	1	4	5	7
Function	GND	Vin	+Vo	-Vo